



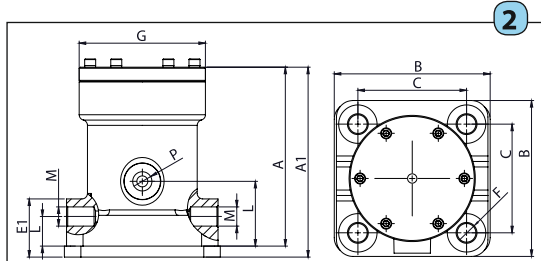

TECHNICAL DATA SHEET

Type	Draw.	Overall dimension																											
		A		A1		B		C		D		E		E1		F		G		H		P	L		M	N		Weight	
		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in		mm	in		mm	in	Kg	lb
P25	1	92	3,62	98	3,90	115	4,52	85	3,34	70	2,75	21	0,80	27	1,06	13	0,51	58	2,28	30	1,18	1/4"	10,5	0,41	1/4"	25	0,98	2,2	4,9
P40	1	121	4,76	127	5,00	148	5,8	110	4,33	91	3,58	25	1,00	31	1,22	17	0,67	75	2,95	45	1,77	3/8"	16	0,63	3/8"	35	1,37	4,5	9,9
P60	2	163	6,41	173	6,4	138x142	5,4x5,5	99x99	3,9x3,9	125	4,92	28	1,1	38	1,50	17	0,67	115	4,52	60	2,36	1/2"	27	1,06	2x1/2"	60	2,36	11	24,3

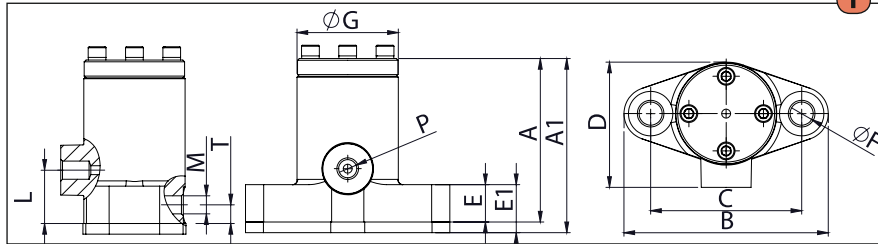

Type	Features																							
	2 BAR - 29 PSI						4 BAR - 58 PSI								6 BAR - 87 PSI									
	Vibration		Force		Dynamic Moment		Air Consump.		Vibration		Force		Dynamic Moment		Air Consump.		Vibration		Force		Dynamic Moment		Air Consump.	
	V/min	N	lb	Kg*cm	in*lb	L/min	Cfm	V/min	N	lb	Kg*cm	in*lb	L/min	Cfm	V/min	N	lb	Kg*cm	in*lb	L/min	Cfm			
P25	2500	294	66,1	0,43	0,37	55	1,94	3800	680	152,9	0,43	0,37	80	2,83	4500	954	214,5	0,43	0,37	200	7,1			
P40	1650	484	108,8	1,63	1,41	31	1,09	2200	860	193,3	1,63	1,41	120	4,24	2800	1396	313,8	1,63	1,41	250	8,8			
P60	1200	1296	291.3	4.11	3.57	100	3.53	1600	2304	517.9	4.11	3.57	250	8.83	1900	3250	730.6	4.11	3.57	400	14.1			

APPLICATION

HOPPER SILO - SALT SPREADER - DUMP TRAILER - RAIL CART

POWDER

HYGROSCOPIC - HUMID - STICKY

PROBLEM SOLVING

BRIDGE AND RAT-HOLING

FEATURES

DUTY CICLE

CONTINUOUS

WORKING PRESSURE

FROM 2 BAR TO 6 BAR (FROM 29 PSI TO 87 PSI)

PNEUMATIC CIRCUIT

FILTER+FLOW CONTROL VALVE+LUBRIFICATION+3/2 WAYS VALVE

AIR SUPPLY QUALITY

CLASS 5.4.4.

WORKING TEMPERATURE

FROM -20°C TO 200°C (FROM -4°F TO 392°F)

MAX NOISE LEVEL

100dB(A)

TECHNOLOGY

PISTON PNEUMATIC IMPACT

MATERIAL

GREY CAST IRON BODY (POWDER PAINTED) - ALUMINUM COVER

OPTION

KIT ATEX

II 2D cT(x) / II 2G cT(x)

SAFETY CHAIN

AVAILABLE

